ro tronic

Datenblatt - Fiche technique - Data sheet

11.03.1250

ROLINE SATA 3.0 Gbit/s Daten- und Stromkabel (4pol. HDD), 1 m

ROLINE Câble données et alimentation SATA 3.0 Gbit/s 4 pôles, 1m

ROLINE SATA 3.0 Gbit/s Data and Power Cable (4-pin HDD), 1 m,

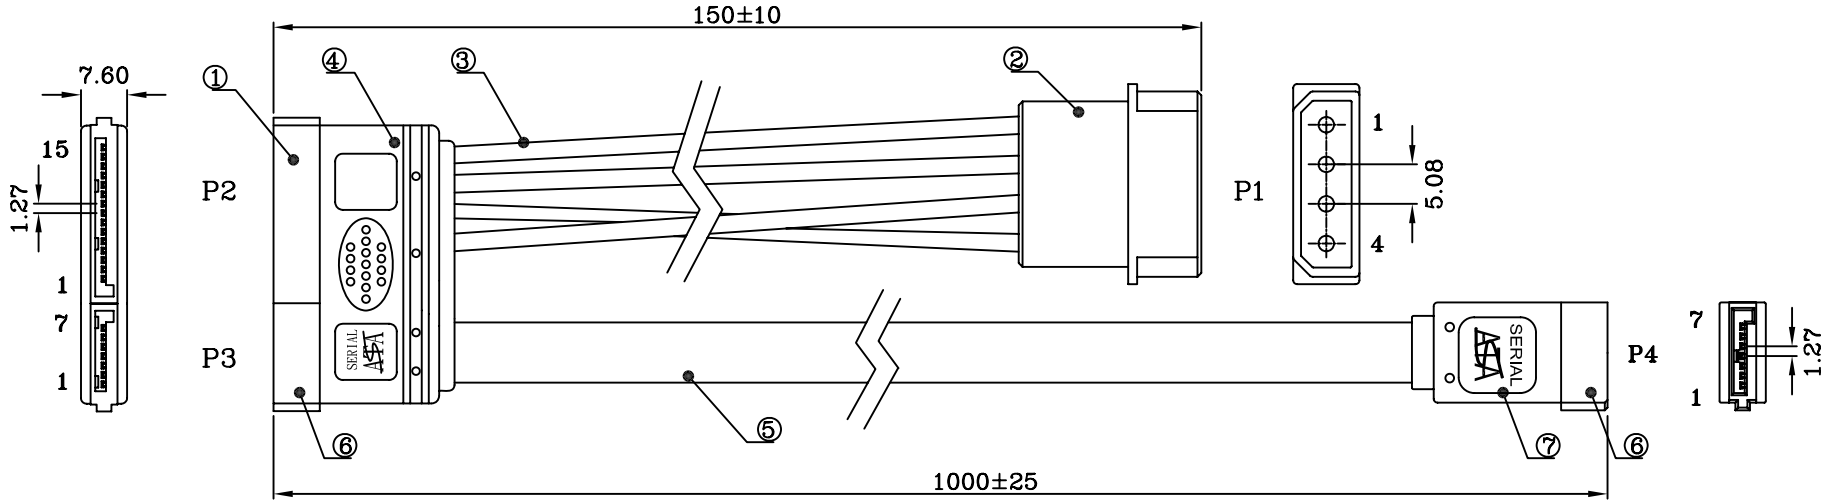

WIRE CONNECTION:

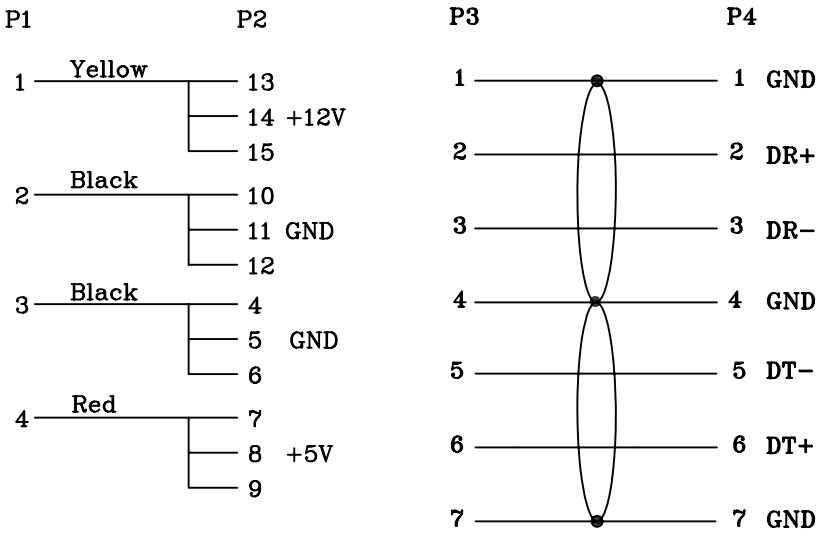

- (RoHS Compliant)
- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

NO.	DATE	MODIFICATION
4	2003.08.22	長度尺寸增加
3	2003.06.17	長度公差修改
2	2003.06.11	外觀修改加厚1.6mm
1	2003.04.04	外觀修改

	COMPONENTS	DESCRIPTION	Q'TY
1	SA15F	Insulator :SPS UL94V-0 ,Black , Contact :Phosphor Bronze	1
2	Power Plug	4P Male	1
3	Wire	UL1007 18AWG (Color: BLACK X2 ,YELLOW X1 , RED X1) L : 140mm	4
4	HOOD	PVC Molded Color: Black	1
5	CABLE (DER AN)	SERIAL ATA CABLE, UL2725, (26AWG*2C+HMAM+2D)*2PCS. FLAT CABLE, Red COLOR, 2.2*7.6, Insulator Material: FM-PE	1
6	SA07F	Insulator:SPS UL94V-0,Black,Contact:Phosphor Bronze GOLD PLATED 15u"	2
7	HOOD	PVC Molded Color: Black	1

Rotronic Co.,Ltd

WT P/N: 11.03.1250

CUSTOMER P/N:

DESCRIPTION: Serial ATA Cable

APPROVED BY: Peter	DATE: 22.AUG.2003
CHECKED BY: Chen	DATE: 22.AUG.2003
SALES: 陳政豐	DATE: 22.AUG.2003
NAME:	
SCALE: X:1	UNIT: mm / VERSION: E
DRAWN BY: 高麗麗 2003.06.17	DRAWING NO: 9028-1001-161XX10